


DOCAN

C3200


Resolution
400*2400dpi

Printing Speed
99sqm/h
(Production)

Printing Size
3.2m

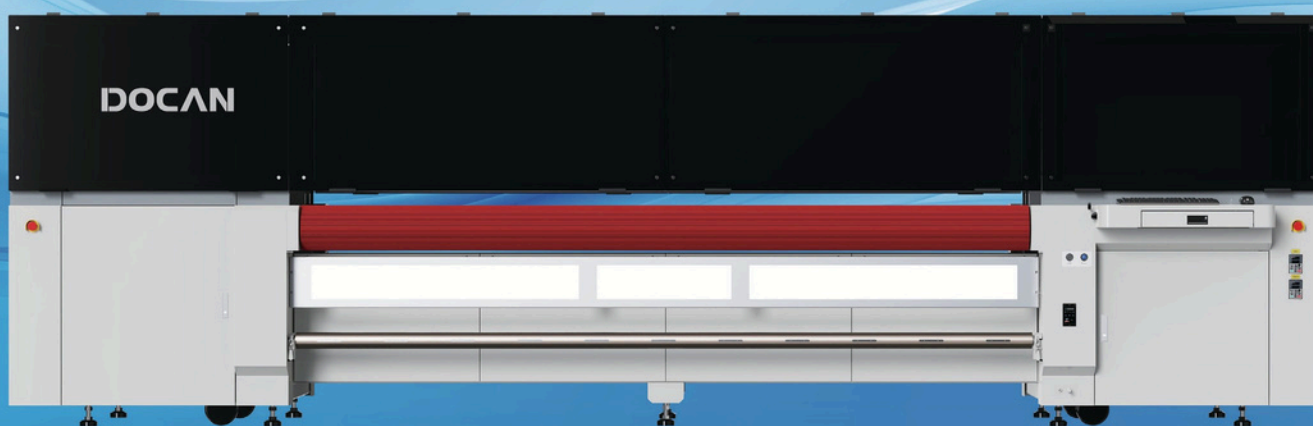


Ricoh Gen6




4Pass(6Row): 108~120sqm/h
6Pass(6Row): 84~94sqm/h
8Pass(6Row): 66~74sqm/h

Konica 1024A



4Pass(4Row): 100~120sqm/h
6Pass(4Row): 78~94sqm/h
8Pass(4Row): 58~70sqm/h

Konica 9888H




4Pass(4Row): 116~148sqm/h
6Pass(4Row): 82~99sqm/h

C3200




PREMIUM 3.2M HYBRID UV PRINTER

DEVICE CONFIG _____///



Expansion Roller



Vacuum Zone Control



Foot Pedal Control



Ink Bottle & InkLevelAlarm

EQUIPMENT PARAMETERS _____///

Printer Model	C3200		
Print Head Options	Ricoh Gen6 (5PL)	Konica 1024A (6PL)	Konica 9888H(5PL)
Printing Size	3200mm		
UV Lamp	UV LED Light		
Rip Software	SAI/ONYX/Caldera		
Media Thickness	1-50mm		
Print Head Number	2-24pcs	4-28pcs	2-24pcs
Ink Color	CMYK/LC/LM+W+V		CMYK/LC/LM/O/LK+W+V
Resolution	726*600dpi	479*720dpi	400*1200dpi
	726*900dpi	479*1080dpi	400*1800dpi
	726*1200dpi	479*1440dpi	400*2400dpi
Ink Tank Volume	3.5L		
Image Format	TIFF, JPEG, EPS, PDF		
Printing Speed	4Pass(6 Row) 108~120sqm/h	4Pass(4 Row) 100~120sqm/h	4Pass(4 Row) 116~148sqm/h
	6Pass(6 Row)84~94sqm/h	6Pass(4 Row) 78~94sqm/h	6Pass(4 Row) 82~99sqm/h
	8Pass(6 Row)66~74sqm/h	8Pass(4 Row) 58~70sqm/h	
Power Supply	AC220V 50/60HZ 14KW 64A		
Environment	Temperature 20-28 °C		
	Humidity 40-60%		
Machine Dimensions	Machine:6000*2300*1900mm Media Table Size:6000*3100*1900mm		
Machine Weight	3500kg		
Outdoor Lifetime	2Year(use DOCAN ink)		
Warranty	One year		

*For detailed information on other available models, please refer to the product brochure.