


1. Features

- ✧ Rolled cooper FPC, better thermal dissipation & bend-ability
- ✧ 20WAG or above cables
- ✧ Each 3 LED per unit with a couple of soldering pads for secondary operation
- ✧ Enhanced 2835 LED especially for strip products

2. Applications

- ✧ Curve lighting
- ✧ Freeze lighting
- ✧ Light bar light source
- ✧ Special sign

3. Dimensions

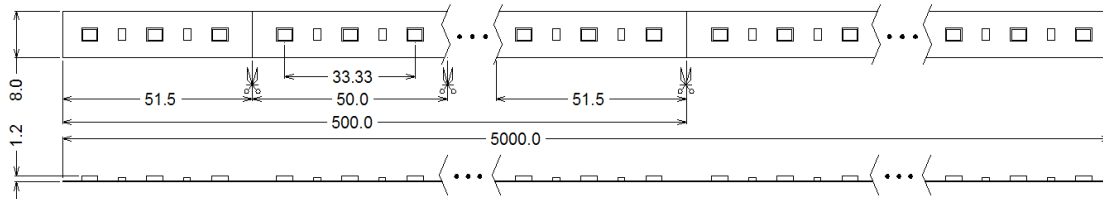

4. Environmental and Application Conditions

Ambient temperature range (TA on free air)	-25...+50°C
Operating (case) temperature range (TC)	-25...+50°C
Storage temperature range	-25...+60°C
IP rating	IP33

5. Electrical parameters

Supply voltage range	12.5 ± 0.5 VDC
Supply Current range (per meter)	500mA
Power range (per meter)	6 W
ESD protection	Contact 4KV, Air 8KV