


1. Features

- ✧ Constant Current Technology (CCT),
- ✧ The Aluminum plate for heat dissipation
- ✧ Energy saving, Environment friendly
- ✧ Long life span

2. Applications

- ✧ Commercial standing lighting
- ✧ Light box lighting
- ✧ Logo lighting
- ✧ Line/shape lighting

3. Dimensions

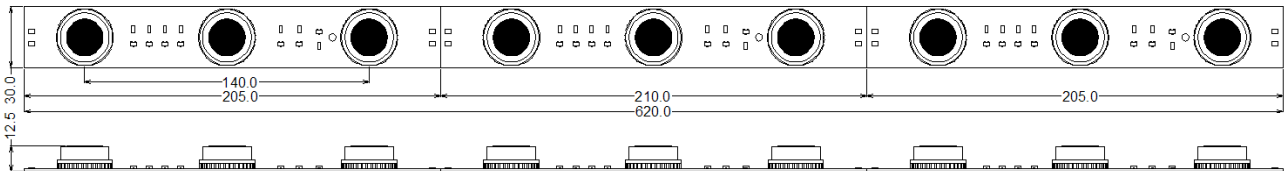

4. Environmental and Application Conditions

Ambient temperature range (TA on free air)	-25.....+55°C
Operating (case) temperature range (TC)	-25.....+55°C
Storage temperature range	-25.....+65°C
IP rating	IP33

5. Electrical parameters

Supply voltage range	12.5±0.5 VDC
Supply Current range (per module)	1.35A
Power range (per module)	16.2 W
ESD protection	Contact 4KV, Air 8KV