

## Technical Data Sheet

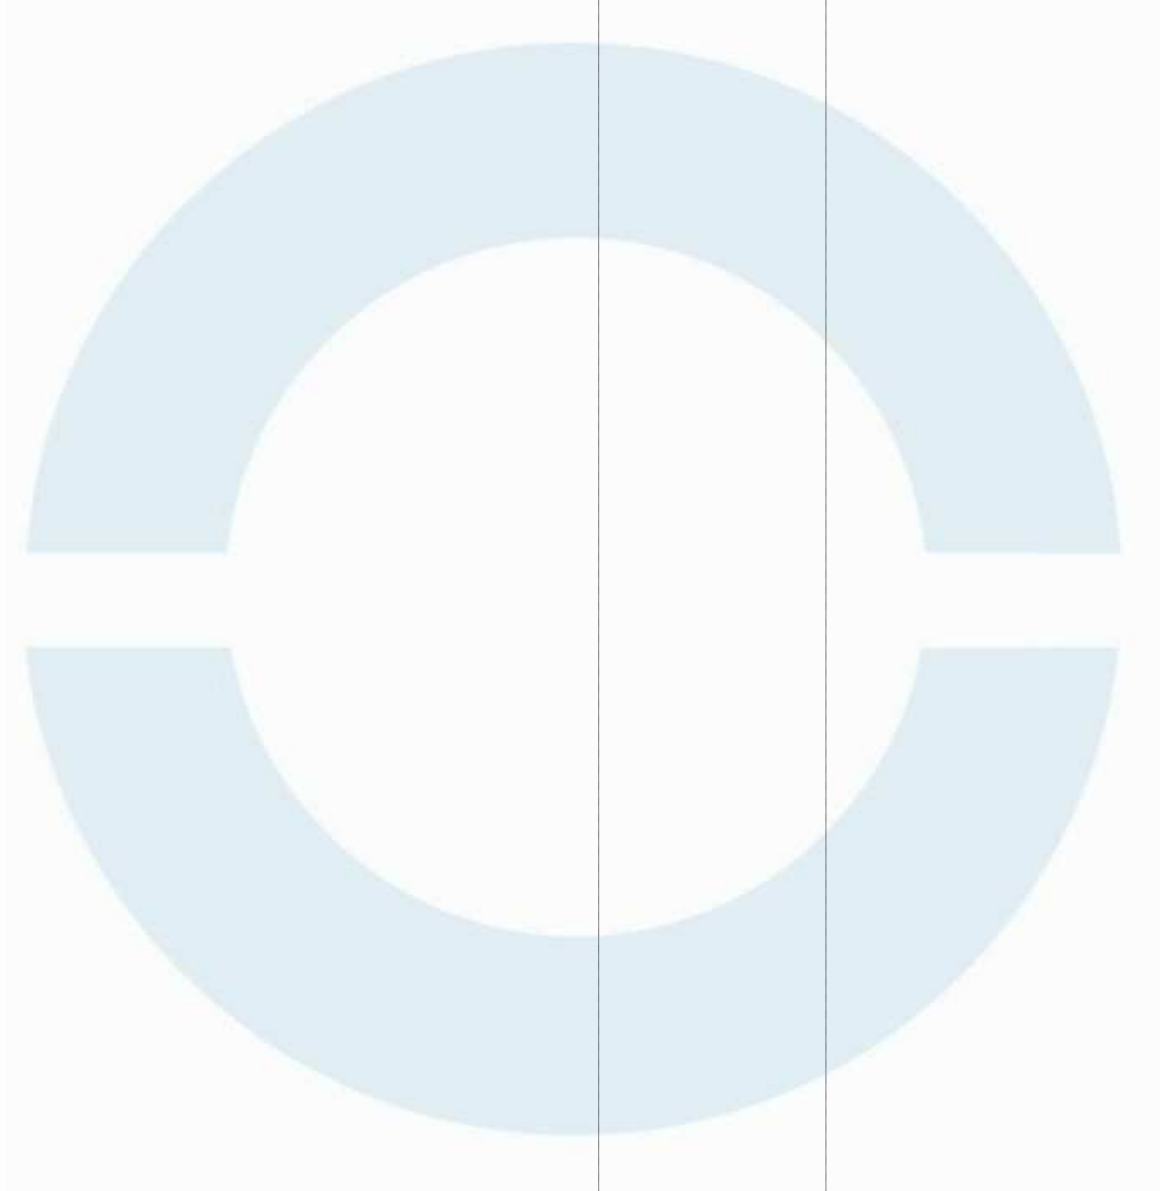
# P6808

|                                                                                                                                                                                                                                        |                       |                        |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|------------------------|
| Fabric / Weefsel / Tissu / Gewebe                                                                                                                                                                                                      | 100 % PES / 1100 dtex |                        |
| Total weight / Gewicht totaal / Poids total / Totalgewicht                                                                                                                                                                             | 900 g/m <sup>2</sup>  | DIN EN ISO 2286/2 1998 |
| Lacquering / Vernis / Lackierung                                                                                                                                                                                                       | 1/1                   |                        |
| Embossing / Kalander / Calandre / Lackierung                                                                                                                                                                                           | Dull                  |                        |
| Breaking strength Warp<br>Treksterkte Ketting<br>Résistance rupture Chaîne<br>Höchstzugkraft Kette                                                                                                                                     | 4000 N/5cm            | EN ISO 1421/1 1998     |
| Breaking strength Weft<br>Treksterkte Inslag<br>Résistance rupture Trame<br>Höchstzugkraft Schuss                                                                                                                                      | 4000 N/5cm            | EN ISO 1421/1 1998     |
| Tear strength Warp<br>Scheurweerstand Ketting<br>Résistance à la déchirure Chaîne<br>Weiterreisskraft Kette                                                                                                                            | 600 N                 | DIN 53363 2003         |
| Tear strength Weft<br>Scheurweerstand Inslag<br>Résistance à la déchirure Trame<br>Weiterreisskraft Schuss                                                                                                                             | 500 N                 | DIN 53363 2003         |
| Adhesion / Hechting / Adhérence / Haftung                                                                                                                                                                                              | 100 N/5cm             | EN ISO 2411 2000       |
| Temperature resistance / Temperatuursbestendigheid / Tenue à la température / Temperatuursbeständigkeit                                                                                                                                | -30/+70 °C            | DIN EN 1876/2 1998     |
| Light fastness (Except white and (half-)transparent)<br>Lichtechtheid (Uitgezonderd wit en (half-)transparent)<br>Tenue à la lumière (Excepté en blanc et (semi-)transparent)<br>Lichtechtheit (Ausnahme weiss und (semi-)transparent) | 7-8                   | ISO 105 B02 2014       |

"This product may for certain colours contain substances (Lead Pigments ) which fall under the Annex XIV of the Reach Regulation 1907/2006/CE.  
In order to know which colours fall under this annex , you can take contact with the technical department of Sioen Industries.  
Upon request those substances can be eliminated from the product."

## Technical Data Sheet

# P6808

|                                                                                     |              |               |
|-------------------------------------------------------------------------------------|--------------|---------------|
| Fire behavior / Brandgedrag / Reaction au feu / Brennverhalten                      | < 100 mm/min | ISO 3795 1989 |
| Application -> Truck/Graphic/Fullcolor/Digital Print/Inkjet                         |              |               |
|  |              |               |

"This product may for certain colours contain substances (Lead Pigments ) which fall under the Annex XIV of the Reach Regulation 1907/2006/CE.  
In order to know which colours fall under this annex , you can take contact with the technical department of Sioen Industries.  
Upon request those substances can be eliminated from the product."